


## Thermally-Enhanced High Power RF LDMOS FET 1000 W, 50 V, 1030 / 1090 MHz

### Description

The PTVA101K02EV LDMOS FET is designed for use in power amplifier applications in the 1030 MHz / 1090 MHz frequency band. Features include high gain and thermally-enhanced package with bolt-down flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA101K02EV  
Package H-36275-4

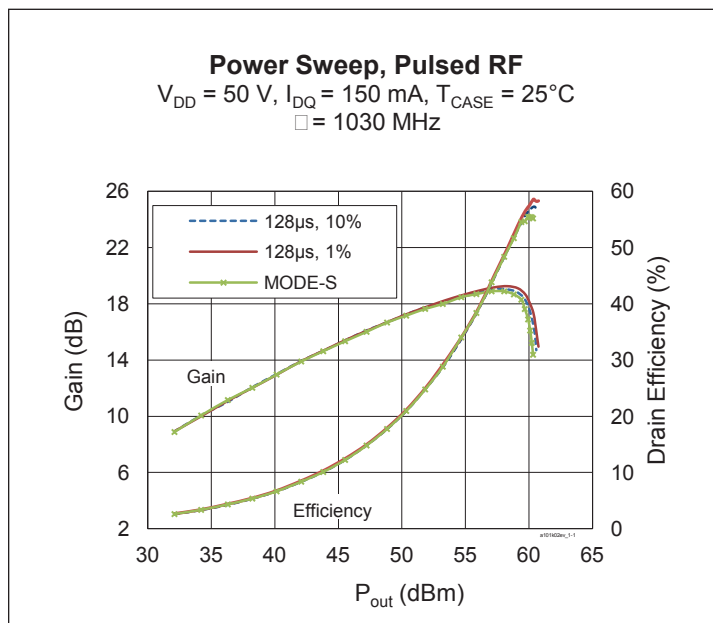

### Features

- Broadband input matching
- High gain and efficiency
- Integrated ESD protection
- Human Body Model Class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at 1000 W under MODE-S pulse condition, (32µS ON / 18µS OFF) X 80, LTDF = 6.4%.

### RF Characteristics

#### Pulsed RF Performance (tested in Infineon test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 0.15\text{ A}$ ,  $P_{OUT} = 900\text{ W}$ ,  $f = 1030\text{ MHz}$ , 128 µs pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	17	18	21	dB
Drain Efficiency	$\eta_D$	62	65	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics

**Typical RF Performance** (not subject to production test, verified by design/characterization in Infineon test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 75\text{ mA}$  per side, Input signal ( $t_r = 5\text{ ns}$ ,  $t_f = 6.5\text{ ns}$ ),  $T_{CASE} = 25^\circ\text{C}$ , class AB test

Mode of operation	$f$ (MHz)	IRL (dB)	$P_{1dB}$			$P_{3dB}$			$P_{\text{droop(pulse)}}$ dB @ 1000 W	$t_r$ (ns)	$t_f$ (ns)
			Gain (dB)	Eff (%)	$P_{OUT}$ (W)	Gain (dB)	Eff (%)	$P_{OUT}$ (W)			
128 $\mu\text{s}$ , 10%	1030	20	18	56	980	16	57	1090	0.18	7	8
128 $\mu\text{s}$ , 1%	1030	20	18.1	57	1010	16.1	58	1130	0.16	7	8
MODE-S (32 $\mu\text{s}$ ON / 18 $\mu\text{s}$ OFF)X80, LTDF=6.4%	1030	20	17.9	54	930	14.9	55	1060	0.45	7	8
128 $\mu\text{s}$ , 10%	1090	13	18.3	59	920	16.2	60	1050	0.16	7	8
128 $\mu\text{s}$ , 1%	1090	14	18.4	60	950	16.4	61	1080	0.17	7	8

## DC Characteristics (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1	$\mu\text{A}$
	$V_{DS} = 105\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 50\text{ V}$ , $I_{DQ} = 150\text{ mA}$	$V_{GS}$	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$



## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Junction Temperature	$T_J$	200	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^\circ\text{C}$
Thermal Resistance ( $T_{CASE} = 70^\circ\text{C}$ , 1000 W, MODE-S)	$R_{\theta JC}$	0.16	$^\circ\text{C/W}$


### Ordering Information

Type and Version	Order Code	Package and Description	Shipping
PTVA101K02EV V1 R0	PTVA101K02EVV1R0XTMA1	H-36275-4, bolt-down	Tape & Reel, 50pcs
PTVA101K02EV V1 R250	PTVA101K02EVV1R250XTMA1	H-36275-4, bolt-down	Tape & Reel, 250pcs



### Typical RF Performance (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

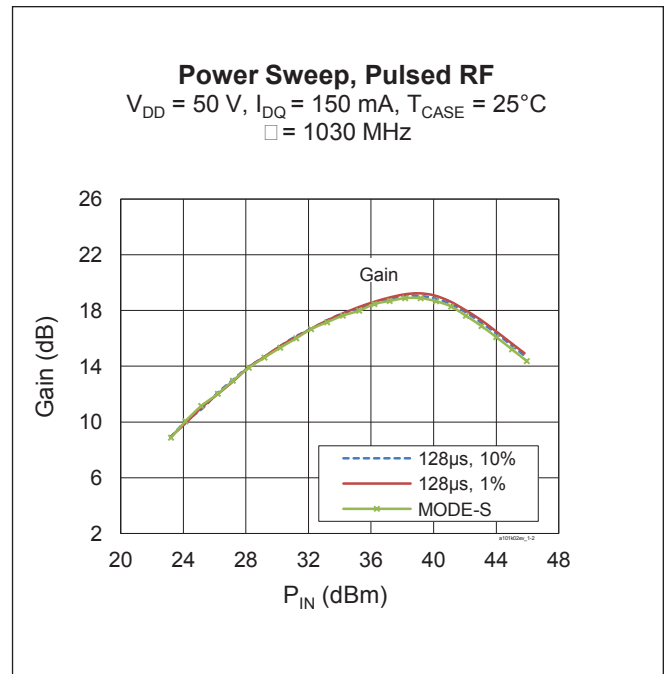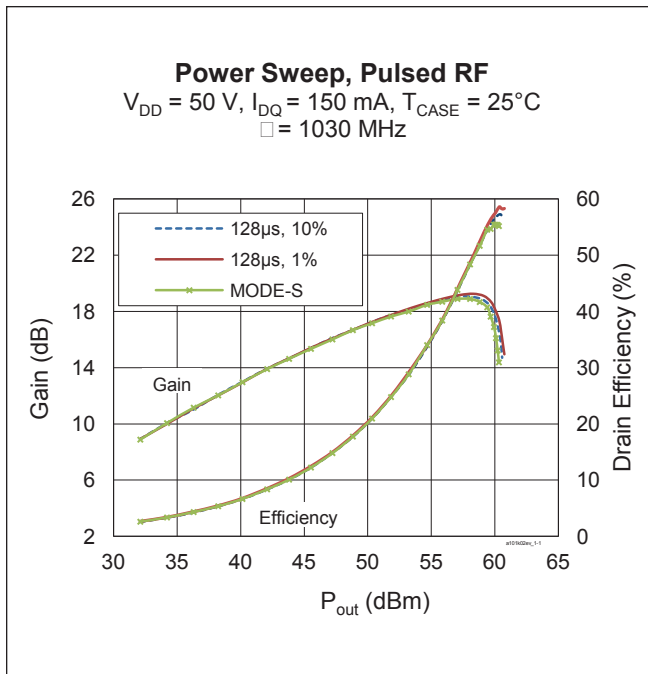


**Typical RF Performance** (cont.) (tested with LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

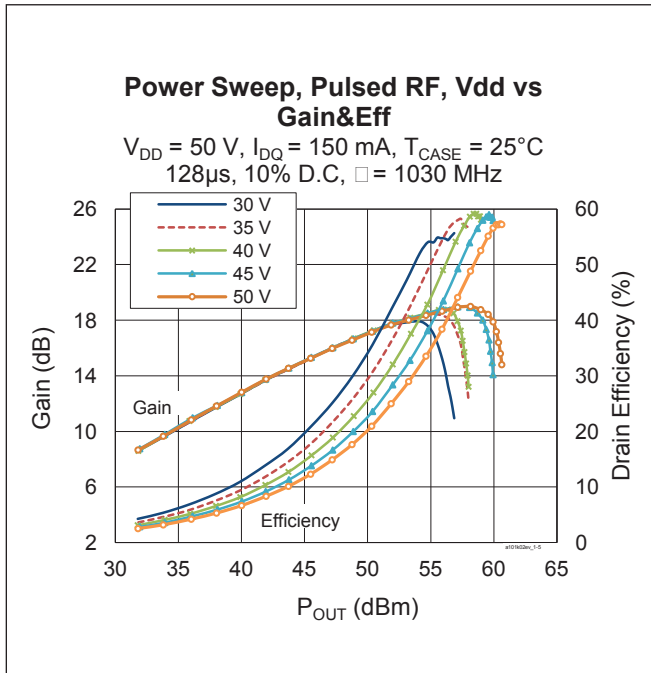

**Typical RF Performance** (tested with LTN/PTVA101K02EV E6 test fixture, 1090 MHz)

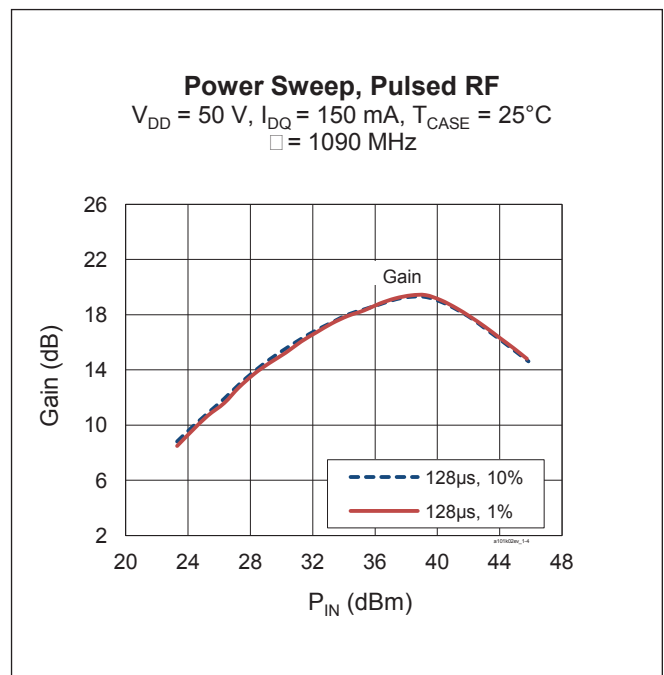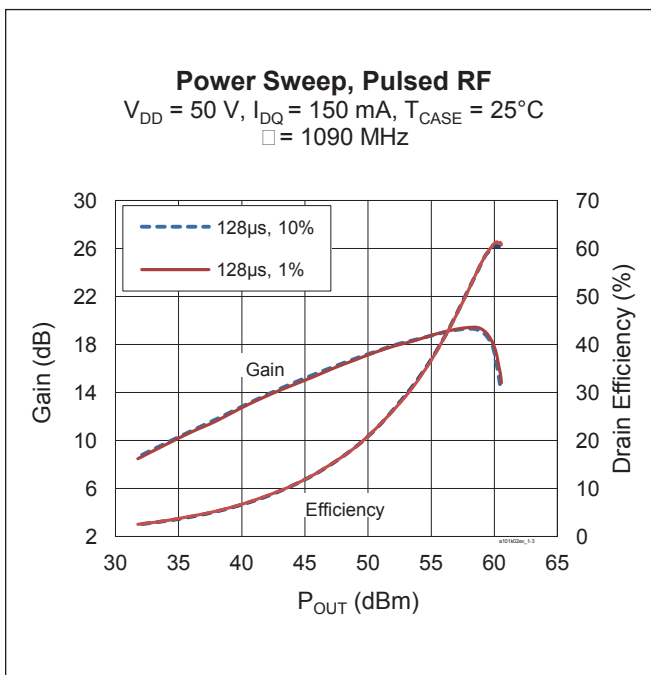

## Broadband Circuit Impedance

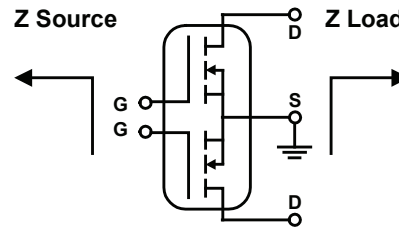

Freq [MHz]	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
1030	2.00	1.51	1.48	0.07
1090	2.35	0.64	1.12	-0.28


Note: Measurement on single side.

## Load Pull Performance

Each Side Load Pull Performance –16  $\mu$ s pulse width, 10% duty cycle, class AB,  $V_{DD} = 50$  V, 100 mA

Freq [MHz]	Max Output Power					Max Efficiency					Z Optimum					
	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	Z <sub>Source</sub> [ $\Omega$ ]
960	58.10	645.65	61.90	16.46	1.14 - j0.08	56.00	398.11	72.20	18.68	0.79 + j0.69	57.50	562.34	68.00	17.50	0.91 + j0.33	1.41 - j1.62
1030	57.80	602.56	55.60	16.00	0.91 - j0.08	56.00	398.11	71.00	18.80	0.71 + j0.66	57.10	512.86	65.00	17.50	0.78 + j0.34	1.76 - j2.12
1090	57.90	616.60	61.80	16.95	0.95 + j0.27	56.20	416.87	69.80	18.68	0.83 + j0.90	57.40	549.54	65.70	17.73	0.87 + j0.62	2.34 - j2.39
1150	57.36	544.50	50.52	15.80	1.11 + j0.12	56.90	489.78	65.00	17.63	0.94 + j0.76	57.20	524.81	61.20	17.00	1.01 + j0.48	3.21 - j1.47
1215	57.26	532.11	53.90	15.60	1.20 + j0.01	55.40	346.74	62.30	17.46	0.59 + j0.81	56.70	467.74	58.45	16.60	0.88 + j0.49	2.37 - j0.84

**Reference Circuit** (LTN/PTVA101K02EV V1 test fixture, 1030 MHz)

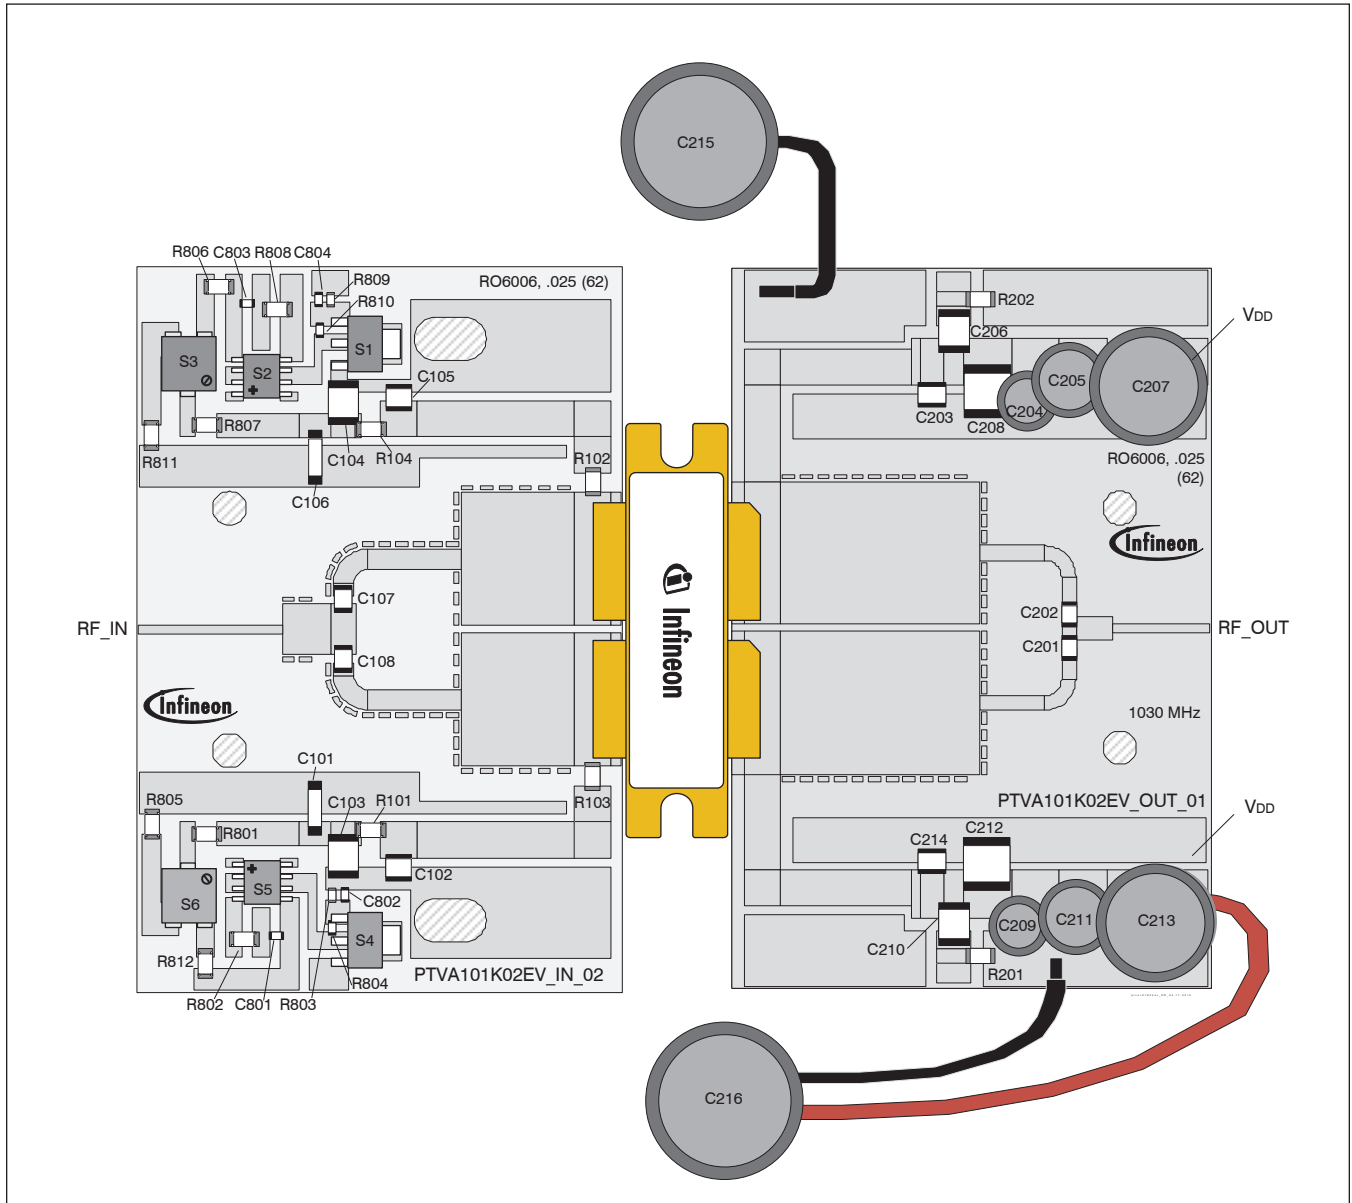

Reference circuit assembly diagram (not to scale)\*

**Reference Circuit** (cont.)


**Reference Circuit Assembly**

DUT	Test Fixture Part No.	PCB	Frequency (MHz)
PTVA101K02EV	LTN/PTVA101K02EV V1	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1030 MHz
PTVA101K02EV	LTN/PTVA101K02EV E4	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E6	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1090 MHz
PTVA101K02EV	LTN/PTVA101K02EV E8	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1030 MHz

**Components Information**

Component	Description	Suggested Manufacturer	P/N
<b>Input</b>			
C101, C106	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C102, C105, C107, C108	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C103, C104	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C801, C802, C803, C804	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R101, R104, R801, R807	Resistor, 10 Ohm	Panasonic Electronic Components	ERJ-8GEYJ100V
R102, R103	Resistor, 100 Ohm	Panasonic Electronic Components	ERJ-8GEYJ101V
R802, R808	Resistor, 6200 Ohm	Panasonic Electronic Components	ERJ-8GEYJ623V
R803, R809	Resistor, 1300 Ohm	Panasonic Electronic Components	ERJ-3GEYJ132V
R804, R810	Resistor, 1200 Ohm	Panasonic Electronic Components	ERJ-3GEYJ122V
R805, R806, R811, R812	Resistor, 2000 Ohm	Panasonic Electronic Components	ERJ-8GEYJ202V
S1, S4	Transistor	Infineon Technologies	BCP56
S2, S5	Voltage regulator	National Semiconductor	LM7805
S3, S6	Potentiometer, 2k ohm	Bourns Inc.	3224W-202ECT-ND
<b>Output</b>			
C201, C202, C203, C214	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C204, C209	Capacitor, 100 $\mu$ F	Panasonic Electronic Components	EEV-HD1V101P
C205, C211	Capacitor, 22 $\mu$ F	Cornell Dubilier Electronics (CDE)	SEK220M100ST
C206, C210	Capacitor, 1 $\mu$ F	TDK Corporation	C4532X7R2A105M230KA
C207, C213	Capacitor, 100 $\mu$ F	Cornell Dubilier Electronics (CDE)	SK101M100ST
C208, C212	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C215, C216	Capacitor, 6800 $\mu$ F	Panasonic Electronic Components	ECO-S2AP682EA
R201, R202	Resistor, 5600 Ohm	Panasonic Electronic Components	ERJ-8GEYJ562V

### Package Outline Specifications

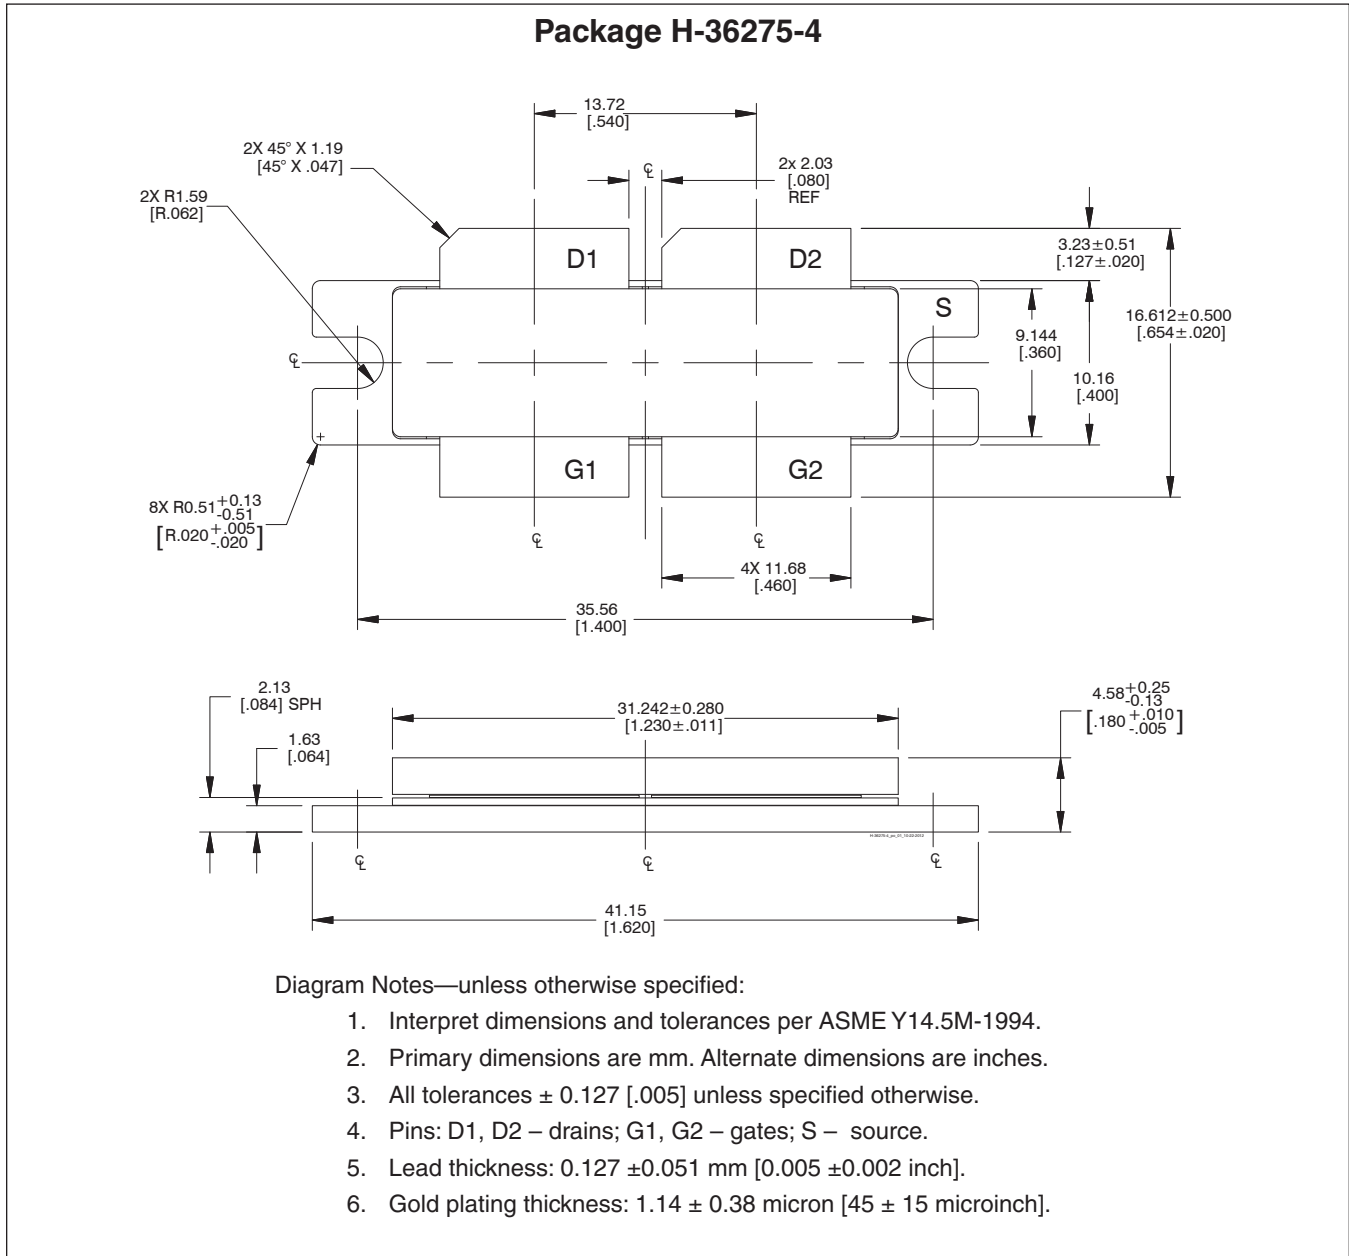

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>



**Revision History:** 2016-04-19 Data Sheet

Previous Version: 2013-04-15, Data Sheet


Page	Subjects (major changes since last revision)
1, 2	Added ESD rating, updated ordering information

**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all?  
 Your feedback will help us to continuously improve the quality of this document.  
 Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:  
 +1 877 465 3667 (1-877-GO-LDMOS) USA  
 or +1 408 776 0600 International



**Edition 2016-04-19**

**Published by**  
**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2012 Infineon Technologies AG**  
**All Rights Reserved.**

**Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

**Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

**Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.