




4805 (3/11)

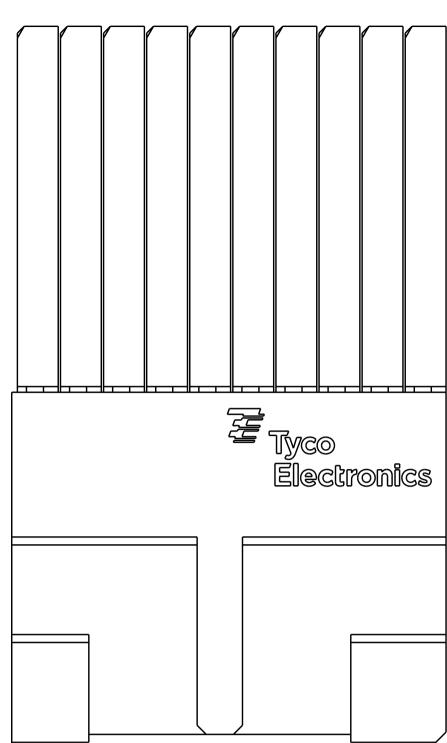

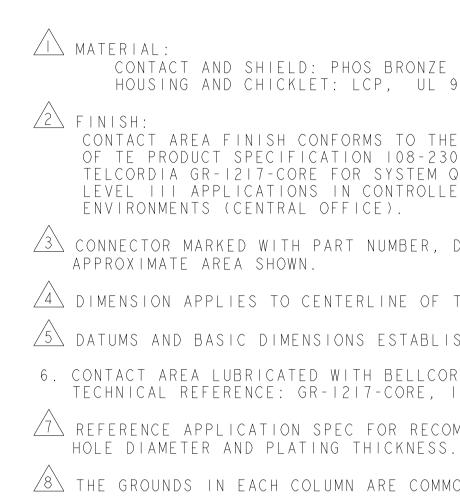

---CONTACT AI INDICATOR



	2					1			
loc A D	dist () ()	P	LTR		REVISIONS		DATE	DWN	APVD
			А	REVISED PER	ECO-14-013100		02SEP2014	ΑP	RP

CONTACT AND SHIELD: PHOS BRONZE HOUSING AND CHICKLET: LCP, UL 94V-0, COLOR: BLACK

CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).

CONNECTOR MARKED WITH PART NUMBER, DATE CODE, 85 OHM, AND STANDARD IN APPROXIMATE AREA SHOWN.

4 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.

5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

6. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE I, NOVEMBER 1995.

7 REFERENCE APPLICATION SPEC FOR RECOMMENDED PLATED THRU

A THE GROUNDS IN EACH COLUMN ARE COMMONED.

| 934932 - |

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT W SOURBEER « <u>RITTER</u> 02MAY2008 I **E**TE TE Connectivity TOLERANCES UNLESS OTHERWISE SPECIFIED: RECEPTACLE ASSEMBLY, 5 PAIR, IO COLUMN TinMan 85 OHM DUCT SPEC | 08-2303-| PPLICATION SPEC ZE CAGE CODE DRAWING NO RESTRICTED ||4-|3243 1 00779 C = 19349322SCALE 6: SHEET | OF | REV A STOMER DRAWING

В